

300 Serie **Miniature**

Assembled **stack** light

Ø 30



Small and **practical** are suitable for every need and environment.

Easy to install and wire. Available in different **color** combinations and with audible unit.

High-brightness LEDs ensures visibility at a distance and great reliability.

Technical features



Compliance

Directive CEE 2014/35 Low voltage - Directive CEE 2014/30
Electromagnetic compatibility - Directive CEE 2006/42 Machinery

Conformity to standards

EN 60947.5.1 - EN 60204.1 - EN 60073 - EN 60529 -
EN 60068.2.6 - EN60068-2-27 - EN ISO 7731 - EN 981 - IEC 536

Material

Polycarbonate (PC)

Operating voltage

24 V DC (+/- 10%)

Current consumption

20 mA per unit

Protection degree

IP 54 (if correctly assembled)

Protection against electric shock

class II, safety insulation (IEC 536)

Resistance to vibrations

2 day min (10-150 Hz)

Operating temperature

- 20° C + 50° C

Units color



Number of combinable units

max 6 - 5 light modules and 1 audible unit

Audible unit

75 dB at 1 mt distance, continuous sound

Connections

with screw cable clamps (max cable size 1,5 mm²)

Choose your stack light...



Codes and data for ordering	Support color	Units color
TWR30 L1Y2B	●	●
TWR30 L1Y3B	●	●
TWR30 L1Y4B	●	●
TWR30 L1Y5B	●	●
TWR30 L1Y6B	●	●
TWR30 L1Y9B	●	○
TWR30 L2Y52B	●	● ●
TWR30 L3Y532B	●	● ● ●
TWR30 L3A532B*	●	● ● ●
TWR30 L4Y5632B	●	● ● ● ●
TWR30 L4A5632B*	●	● ● ● ●
TWR30 L5Y95632B	●	○ ● ● ● ●
TWR30 L5A95632B**	●	○ ● ● ● ●


Available in any other colour combination
* with sound / ** with sound combined colour

Codes and data for ordering	Support color	Units color
TWR030 L1Y2B	●	●
TWR030 L1Y3B	●	●
TWR030 L1Y4B	●	●
TWR030 L1Y5B	●	●
TWR030 L1Y6B	●	●
TWR030 L1Y9B	●	○
TWR030 L2Y52B	●	● ●
TWR030 L3Y532B	●	● ● ●
TWR030 L3A532B*	●	● ● ●
TWR030 L4Y5632B	●	● ● ● ●
TWR030 L4A5632B*	●	● ● ● ●
TWR030 L5Y95632B	●	○ ● ● ● ●
TWR030 L5A95632B**	●	○ ● ● ● ●



Available in any other colour combination
* with sound / ** with sound combined colour

Code structure...

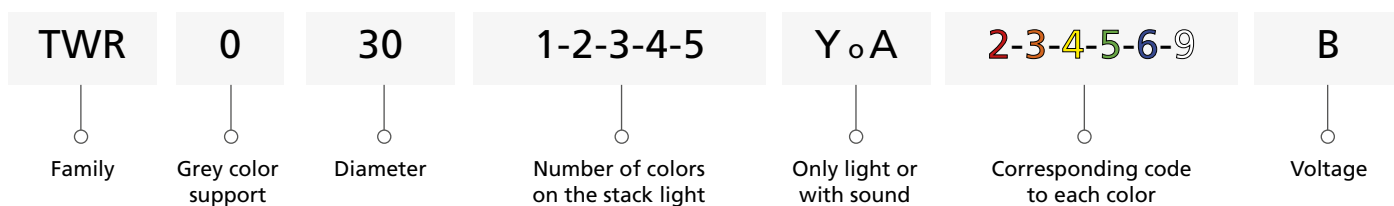

Compose your stack light



max **5** COLORS
+ SOUND



Audible unit



Direct mounting on \varnothing 22 mm holes
or on bases with extension poles

Accessories

