


LED bulbs type 11EBx - 24 V

Specifications

10 LED, 9 for lateral light and 1 for frontal light

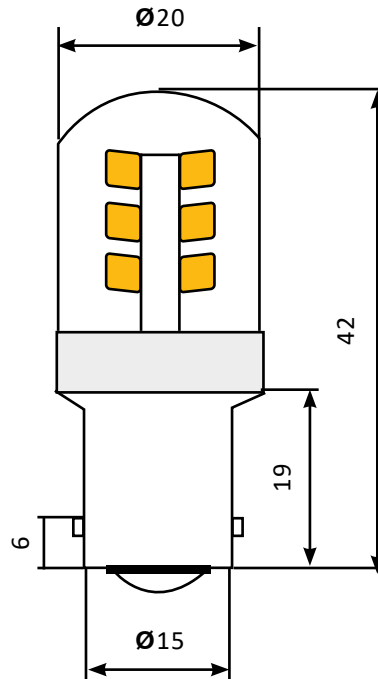

| Emitting color | Red | Yellow | Blue | White | Green |
|------------------------------|---------|---------|---------|---------|---------|
| Volts | 24 V | 24 V | 24 V | 24 V | 24 V |
| Current consumption ± 15% | 30 mA | 30 mA | 30 mA | 30 mA | 30 mA |
| Lumen | 3.2 Lm | 3.1 Lm | 3.0 Lm | 14.0 Lm | 17.7 Lm |
| Life duration | 10k hrs | 10k hrs | 10k hrs | 10k hrs | 10k hrs |
| Base | BA 15d | BA 15d | BA 15d | BA 15d | BA 15d |

Absolute Maximum Ratings AT Ta=25°C

| Parameter | MAX | UNIT |
|--|-----------------|------|
| Power dissipation | 2640 | mW |
| Continuous forward current | 25 | mA |
| Peak forward current (1/10 Duty cycle 0.1 ms pulse width) | 100 | mA |
| Reverse Voltage | 5 | V |
| Operature temperature range | -30°C to +85°C | |
| Storage temperature range | -40°C to +100°C | |